
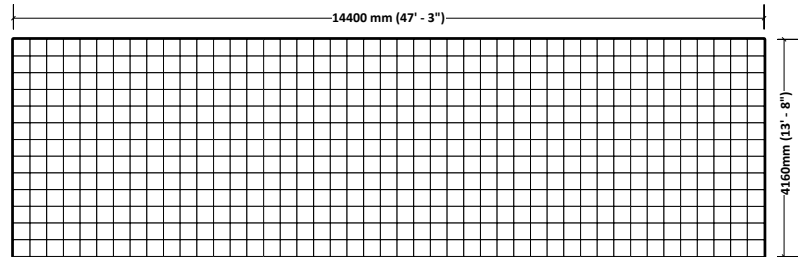



PODH-16CX-14400X4160
16mm OUTDOOR DIGITAL BILLBOARD with front service modules and
high brightness diodes
14400mm X 4160mm (47'-3" X 13'-8")



SPECIFICATIONS

PRODUCT NO.	PODH-16CX-14400X4160		
Description	Outdoor digital sign with aluminum cabinets and front access modules	Screen resolution	900 x 260 real pixels
LED Type	DIP RGB full colour	Pitch	P16 – 1 pixel RGB per 16mm of screen surface
Screen Dimensions	14.40 M x 4.16 M (566 7/8" L x 163 3/4" H)	Power consumption	38,336 watts maximum 13,418 watts average
Cabinet Dimensions	1.28 M x 0.96 M x 0.178 M (50 3/8" L x 37 3/4" H x 7" P)	Drive method	Static scan
Surface	59.90 M ²	Input Power required	120V / 320A 240V / 160A
Brightness	9000 nits (cd/m ²)	Temperatures	-40 °C to +60 °C
Refresh rate	1920 Hz	Power supplies	High performance with PFC power saving
Weight	2156 Kg (4754 lbs)	Sources	Images, video, text, animations
View distance	16 to 150 metres	Lifetime	100,000 hours
Pixel density	3,906 pixels / M ²	Waterproof	IP65
Certifications		View angles	120° horizontal 60° vertical
Warranty	5 years parts and 2 years labor	Aspect ratio	45 : 13