
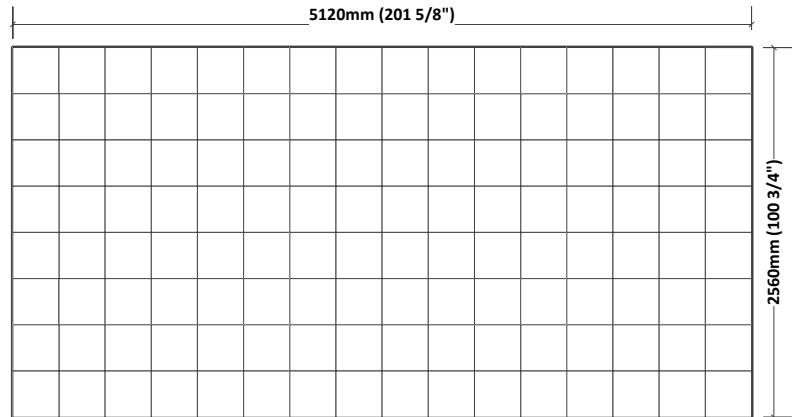



PODH-10CL-5120X2560
10mm COLOUR OUTDOOR DIGITAL SIGN with “quick release” modules
5120mm X 2560mm (16’-10” X 8’-5”)

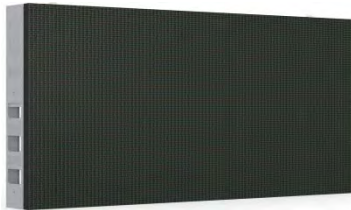

SPECIFICATIONS

PRODUCT NO.	PODH-10CL-5120X2560		
Description	Outdoor Digital sign with aluminum cabinet and front access modules	Screen resolution	512 x 256 real pixels
LED Type	DIP RGB HIGH BRIGHTNESS	Pitch	P10 – 1 pixel RGB per 10 mm of screen surface.
Screen Dimensions	5.12 M x 2.56 M (201 5/8" L x 100 3/4" H)	Power consumption	7210 watts maximum 2524 watts average
Cabinet Dimensions	1.28 M x 1.28 M x 0.115 M (50 3/8" L x 50 3/8" H x 4 1/2" D)	Drive method	1/4 scan saves 75% in electricity
Surface	13.11 M ²	Input Power required	120V / 60A 240V / 30A
Brightness	9000 nits (cd/m ²)	Temperatures	-40 °C to +60 °C
Refresh rate	1920 Hz	Power supplies	High performance with PFC power saving
Weight	459 Kg (1011 lbs)	Sources	Images, videos, text, animations
View distance	10 to 150 metres	Lifetime	100,000 hours
Pixel density	10,000 pixels / M ²	Waterproof	IP65
Certifications	 CAN-ICES-003	View angles	140° horizontal 70° vertical
Warranty	5 years parts and 2 years labor	Aspect ratio	2 : 1