
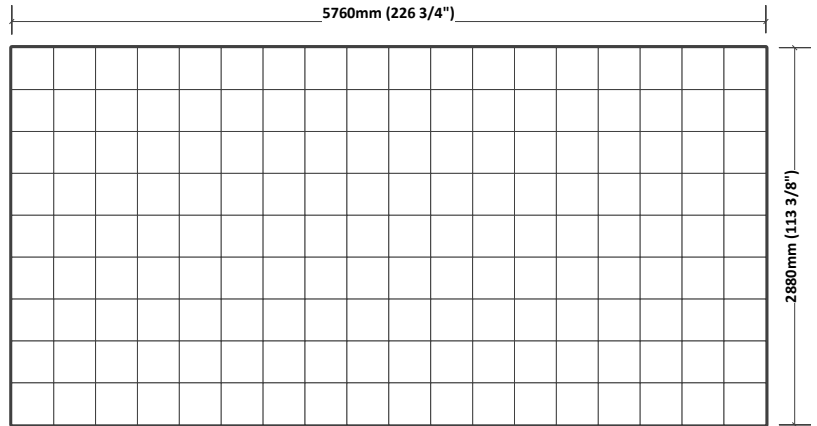



**PODH-10CL-5760X2880**  
**10mm COLOUR OUTDOOR DIGITAL SIGN with “quick release” modules**  
**and high-brightness diodes**  
**5760mm X 2880mm (18’-11” X 9’-5”)**

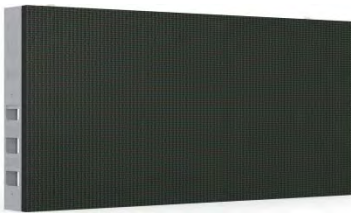

**SPECIFICATIONS**

PRODUCT NO.	PODH-10CL-5760X2880		
Description	Outdoor Digital sign with aluminum cabinet and front access modules	Screen resolution	576 x 288 real pixels
LED Type	DIP RGB HIGH BRIGHTNESS	Pitch	P10 – 1 pixel RGB per 10mm of screen surface
Screen Dimensions	5.76 M x 2.88 M (226 3/4" L x 113 3/8" H)	Power consumption	9125 watts maximum 3194 watts average
Cabinet Dimensions	0.96 M x 0.96 M x 0.115 M (37 3/4" L x 37 3/4" H x 4 1/2" D)	Drive method	1/4 scan saves 75% in electricity
Surface	16.59 M <sup>2</sup>	Input Power required	120V / 100A 240V/ 50A
Brightness	9000 nits (cd/m <sup>2</sup> )	Temperatures	-40 °C to +60 °C
Refresh rate	1920 Hz	Power supplies	High performance with PFC power saving
Weight	498 Kg (1098 lbs)	Sources	Images, video, text, animations
View distance	10 to 150 metres	Lifetime	100,000 hours
Pixel density	10,000 pixels / M <sup>2</sup>	Waterproof	IP65
Certifications	 CAN-ICES-003	View angles	140° horizontal 70° vertical
Warranty	5 years parts and 2 years labor	Aspect ratio	2 : 1