
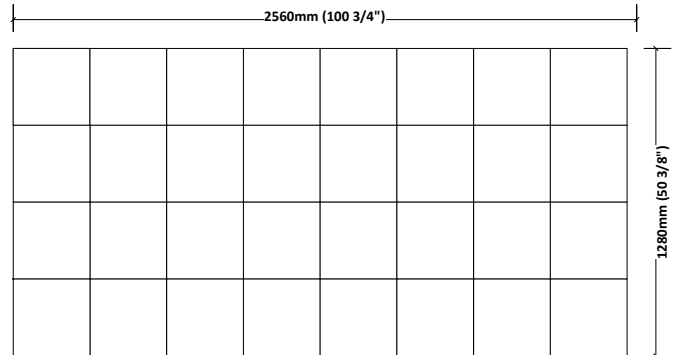


POS-667CL-2560X1280
6.67mm COLOUR OUTDOOR DIGITAL SIGN with “quick release” modules
2560mm X 1280mm (8’-5” X 4’-2”)

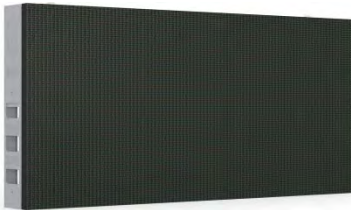

SPECIFICATIONS

PRODUCT NO.	POS-667CL-2560X1280		
Description	Outdoor Digital sign with aluminum cabinet and front access modules	Screen resolution	384 x 192 pixels
LED Type	SMD	Pitch	P6.67 – 1 pixel RGB per 6.67 mm of screen surface
Screen Dimensions	2.56 M x 1.28 M (88 1/8" L x 50 3/8" H)	Power consumption	2559 watts maximum 896 watts average
Cabinet Dimensions	0.96 M x 0.96 M x 0.115 M (37 3/4" L x 37 3/4" H x 4 1/2" D)	Drive method	1/6 scan saves 83% in electricity
Surface	3.28 M ²	Input Power required	120V / 25A
Brightness	6200 nits (cd/m ²)	Temperatures	-40 °C to +60 °C
Refresh rate	920 Hz	Power supplies	High performance with PFC power saving
Weight	148 Kg (325 lbs)	Sources	Images, videos, text, animations
View distance	6 to 125 metres	Lifetime	100,000 hours
Pixel density	22,500 pixels / M ²	Waterproof	IP65
Certifications	 CAN-ICES-003	View angles	140° horizontal 140° vertical
Warranty	5 years parts and 2 years labor	Aspect ratio	2 : 1