
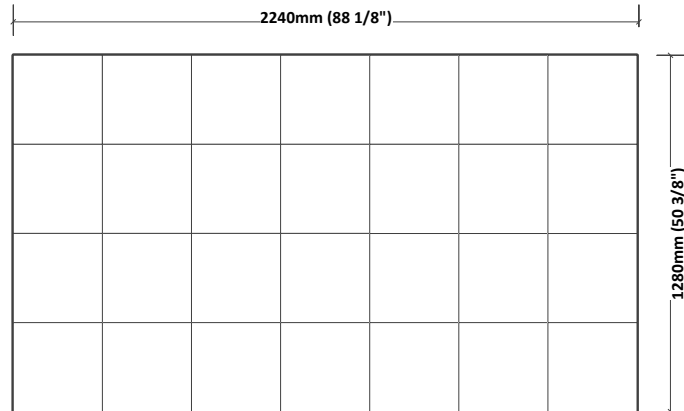



**POS-667CL-2240X1280**  
**6.67mm COLOUR OUTDOOR DIGITAL SIGN with “quick release” modules**  
**2240mm X 1280mm (7'-4" X 4'-2")**

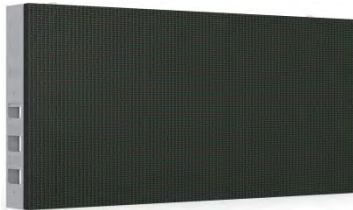

**SPECIFICATIONS**

PRODUCT NO.	POS-667CL-2240X1280		
Description	Outdoor Digital sign with aluminum cabinet and front access modules	Screen resolution	336 x 192 real pixels
LED Type	SMD2727 Nationstar Goldwire	Pitch	P6.67 – 1 pixel RGB per 6.67 mm of screen surface
Screen Dimensions	2.24 M x 1.28 M (88 1/8" L x 50 3/8" H)	Power consumption	2239 watts maximum 784 watts average
Cabinet Dimensions	2.24 M x 1.28 M x 0.115 M (88 1/4" L x 50 3/8" H x 4 1/2" P)	Drive method	1/6 scan saves 83% in electricity
Surface	2.87 M <sup>2</sup>	Input Power required	120V / 20A
Brightness	6200 nits (cd/m <sup>2</sup> )	Temperatures	-40 °C to +60 °C
Refresh rate	1920 Hz	Power supplies	High performance with PFC power saving
Weight	101 Kg (222 lbs)	Sources	Images, video, text, animations
View distance	6 to 125 metres	Lifetime	100,000 hours
Pixel density	22,500 pixels / M <sup>2</sup>	Waterproof	IP65
Certifications	 <b>CAN-ICES-003</b>	View angles	140° horizontal 140° vertical
Warranty	5 years parts and 2 years labor	Aspect ratio	7 : 4