





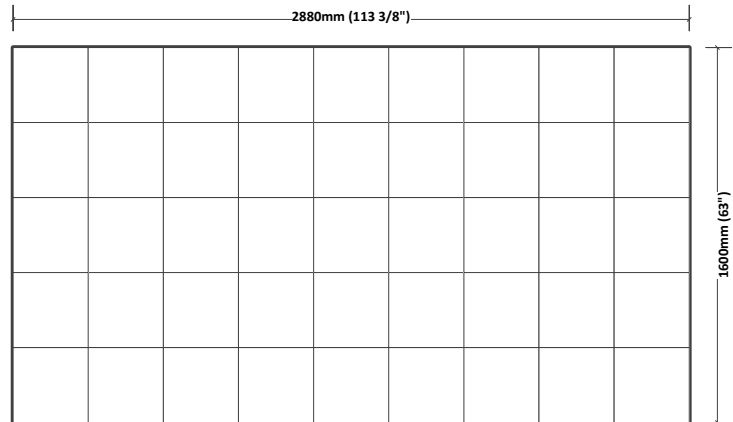

POS-667CL-2880X1600
6.67mm COLOUR OUTDOOR DIGITAL SIGN with front release modules
2880mm X 1600mm (9'-5" X 5'-3")

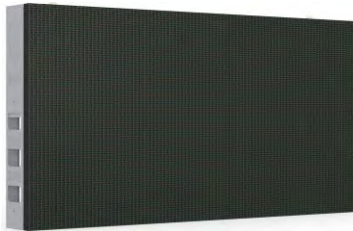

SPECIFICATIONS

PRODUCT NO.	POS-667CL-2880X1600		
Description	Outdoor Digital sign with aluminum cabinet and front access modules	Screen resolution	432 x 240 real pixels
LED Type	SMD2727 Diodes	Pitch	P6.67 – 1 pixel RGB per 6.67mm of screen surface.
Screen Dimensions	2.88 M x 1.60 M (113 3/8" L x 63" H)	Power consumption	2816 watts maximum 986 watts average
Cabinet Dimensions	0.96 M x 0.96 M x 0.161 M (37 3/4" L x 37 3/4" H x 6 1/4" D)	Drive method	1/6 scan saves 80% in electricity
Surface	4.61 M ²	Input Power required	120V / 30A 240V / 15A
Brightness	6000 nits (cd/m ²)	Temperatures	-40 °C to +60 °C
Refresh rate	1920 Hz	Power supplies	High performance with PFC power saving
Weight	161 Kg (356 lbs)	Sources	Images, video, text, animations
View distance	6.7 to 125 metres	Lifetime	100,000 hours
Pixel density	22,500 pixels / M ²	Waterproof	IP65
Certifications	    CAN-ICES-003	View angles	140° horizontal 140° vertical
Warranty	5 years parts and 2 years labor	Aspect ratio	9 : 5